




## Goodyear Rubber Products GOOD FLEX™ Heavy Duty Black Rubber Conveyor Belting

**Features:** This Heavy Duty Conveyor belt series features a minimum 10:1 PIW (per inch of width) breaking strength to working tension rating. We utilize a Polyester / Nylon Carcass for limited stretch lengthwise (Polyester Warp) while providing the ultimate forgiveness and impact resistance the Nylon Weft Cords provide.

Available in a wide variety of constructions utilizing 110# PIW, 150# PIW and 200# PIW fabrics ratings and cover compounds that include SAR (Super Abrasion Resistant), RMA Grade One and Two, MOR, SCORF, MSHA Underground, 400 and 700 Degree High Temperature compounds along with combination Heat & Oil Resistant Compounds. Many options on cover thicknesses mean we may have the perfect belt available **FROM STOCK!!**

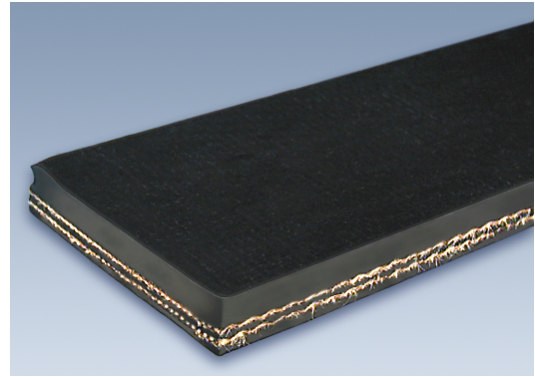


### Conveyor Belt Components

#### Fabric Plies

- › Warp Cords - Provide tensile strength, transverse tear, impact resistance
- › Weft Cords - Provide fastener holding, impact resistance, rip and tear resistance

#### Top Cover

- › Protects the carcass

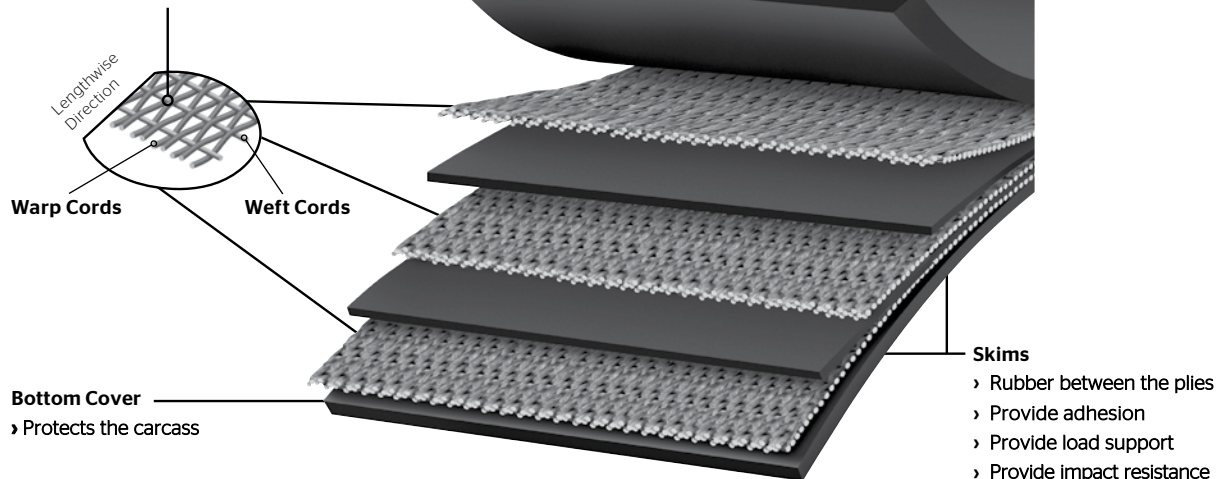

#### Bottom Cover

- › Protects the carcass

#### Skims

- › Rubber between the plies
- › Provide adhesion
- › Provide load support
- › Provide impact resistance

Goodyear Rubber Products, Inc.  
11301 47th Street N  
Clearwater, Florida 33762 USA

International Phone: +1-727-822-4672  
Toll Free in the USA: 1-800-367-4673  
Email: [Sales@GoodyearRubberProducts.com](mailto:Sales@GoodyearRubberProducts.com)  
Website: [www.GoodyearBelting.com](http://www.GoodyearBelting.com)