



flexFLO™

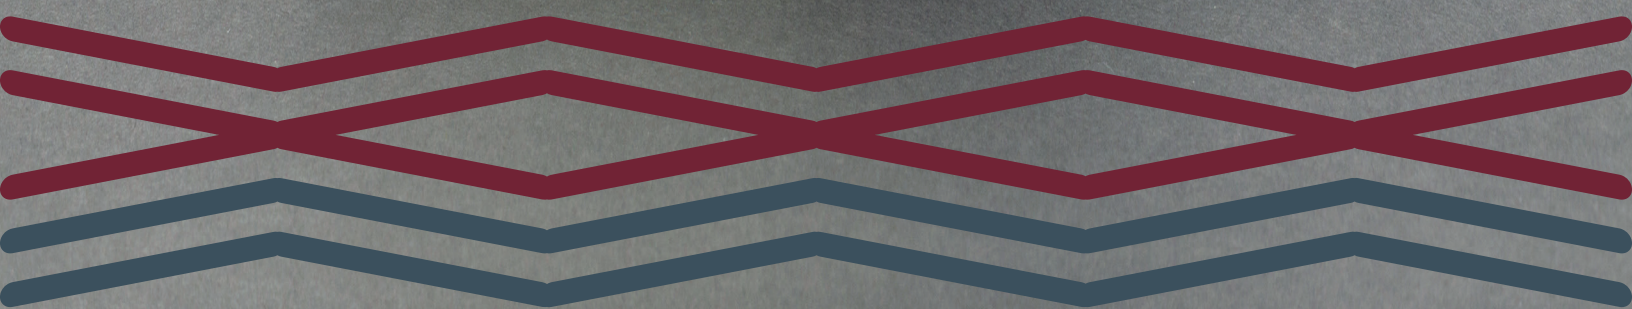


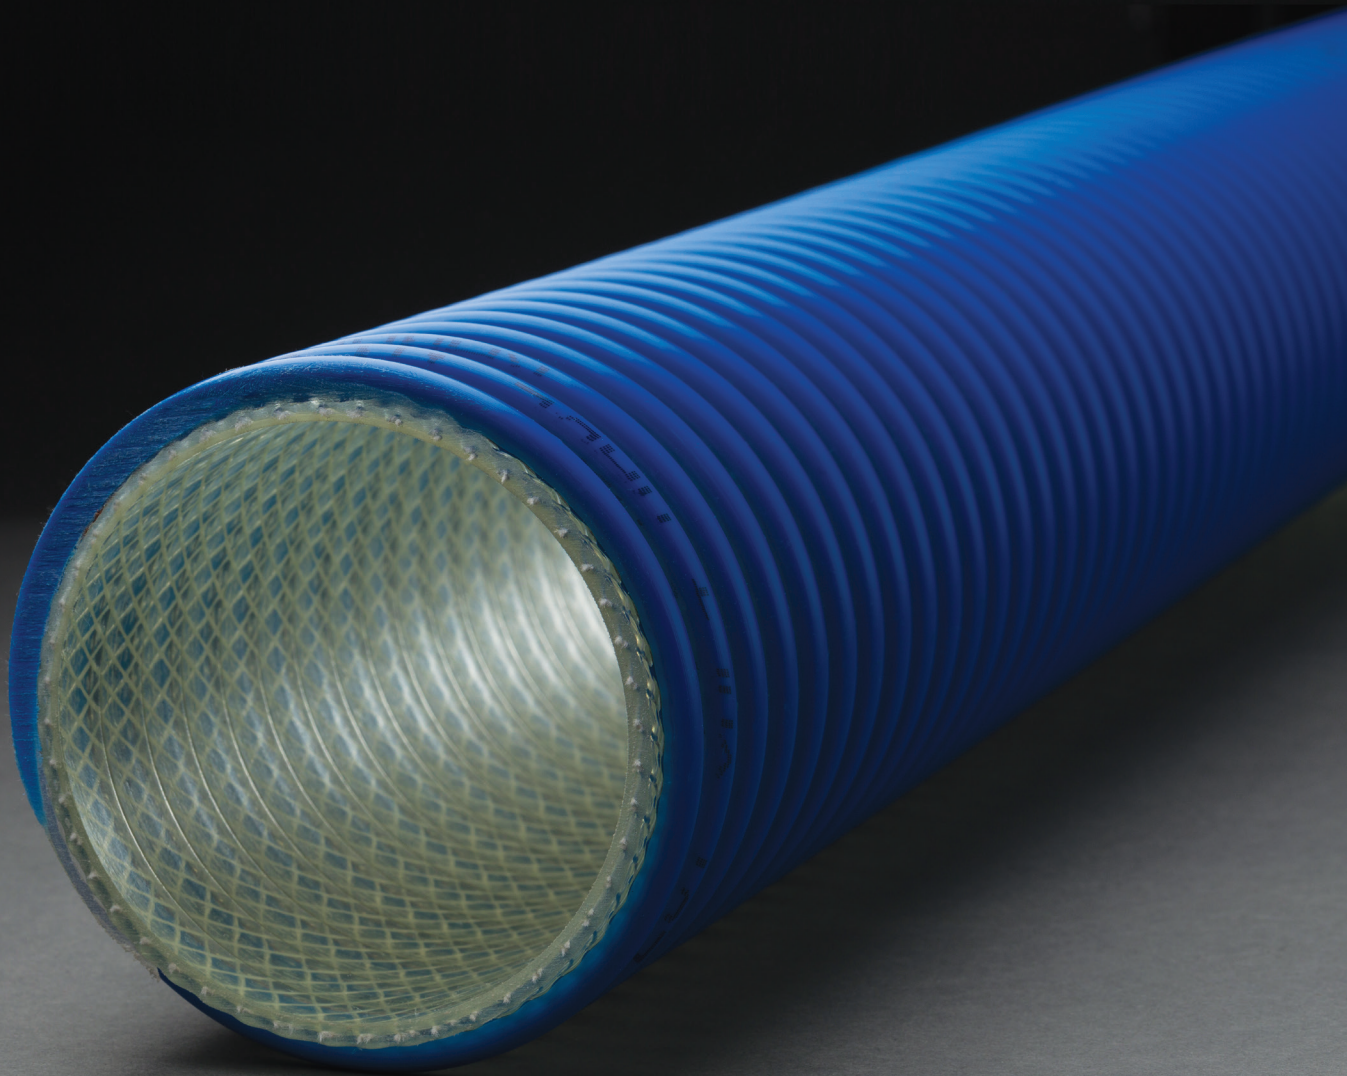

flexFLO™ lite 100 (100 CL)

General water suction and discharge hose

An adaptable solution for diverse applications. Constructed with flexible PVC, it offers easy drag with an external helix, clear sidewall for visual inspection, and smooth bore for precise flow and drainability. Ideal for water pumping on construction sites, as well as general use in agricultural and marine industries.

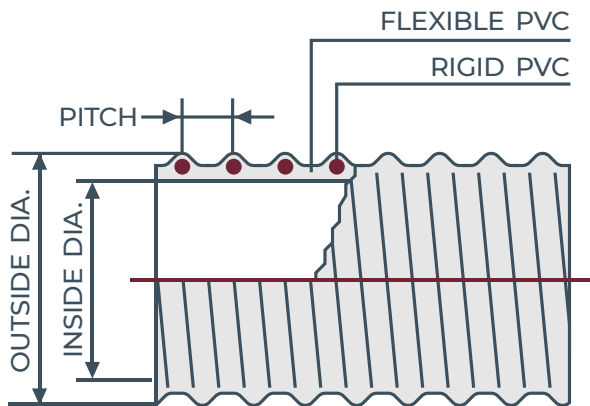

FEATURES

Lightweight and flexible hose constructed with flexible PVC. External helix provides for easy drag. Rated for both suction and discharge. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

The general water and suction hose that can be used for water pumping on construction sites and also serves as a general used hose in both the agricultural and marine industries.

TEMP. RANGE

-13°F to 140°F

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.30	1.5	50	29.8	0.18	100
1-1/4	1.52	0.33	2.0	45	29.8	0.22	100
1-1/2	1.81	0.35	2.5	45	29.8	0.35	100
2	2.36	0.39	3.0	40	29.8	0.50	100
3	3.50	0.59	6.0	35	29.8	1.00	100
4	4.63	0.65	8.0	30	29.8	1.52	100


Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



flexFLO™ lite 100 CW (100 CWFLX)

Cold weather water suction and discharge hose

A versatile solution for demanding cold conditions. Constructed with cold weather PVC, it offers flexibility, easy drag with an external helix, and suitability for both suction and discharge. Ideal for water pumping on construction sites and widely applicable in agricultural and marine industries.

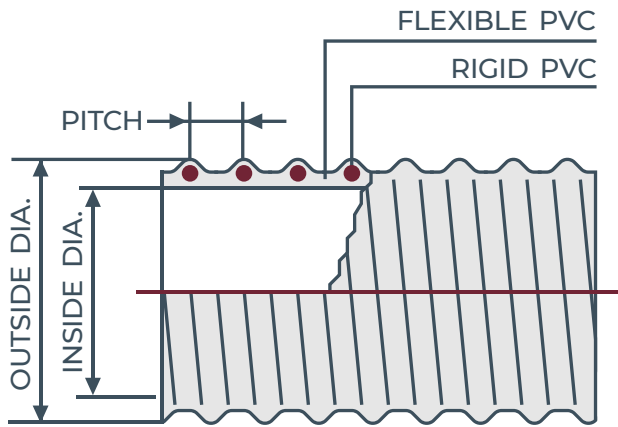

FEATURES

Lightweight and flexible hose constructed with cold weather PVC, making it perfect for the most demanding cold conditions. External helix provides for easy drag. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

APPLICATIONS

The general water and suction hose that can be used for water pumping on construction sites and also serves as a general used hose in both the agricultural and marine industries.

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION

Cold weather PVC, rigid PVC helix, smooth bore, corrugated O.D.

ACCESSORIES

Banding coil, Powerlock clamp

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.30	1.5	40	29.0	0.18	100
1-1/2	1.81	0.35	2.0	35	29.0	0.35	100
2	2.36	0.39	2.5	27	29.0	0.50	100
3	3.50	0.59	5.0	25	29.0	1.00	100
4	4.55	0.65	6.5	20	28.0	1.52	100*
5	5.73	0.85	10.5	20	28.0	2.50	50, 100*
6	6.73	0.85	10.6	20	28.0	3.10	50, 100*

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. Kanaflex will not be responsible for damage to hose due to over flexing.

* 1,000 ft. order minimum for KanaLite CW



flexFLO™ lite U 100 (100 UCLRD)

Medium-duty polyurethane dry material handling hose

Engineered for sub-zero flexibility. With a clear polyurethane-lined PVC tube, it ensures abrasion resistance, visual material flow check, and quiet operation. Ideal for dry material pneumatic conveying, plastic pellet and powder transfer (non-static), and diverse agricultural applications.

FEATURES

Lightweight and flexible in sub-zero temperatures. Clear polyurethane lined PVC tube provides abrasion resistance, permits visual check of material flow, prevents material build up, and provides quiet operation. Corrugated PVC O.D. with raised PVC helix for increased flexibility and easy drag.

APPLICATIONS

Dry material pneumatic conveying systems and plastic pellet and powder transfer when static is not a concern. Agricultural applications, such as air seeders, abrasive material vacuum systems, and industrial vac equipment.

CONSTRUCTION

Flexible polyurethane lined PVC tube, rigid PVC helix, smooth bore, PVC corrugated O.D.

TEMP. RANGE


-13°F to 140°F

ACCESSORIES

Banding coil, Powerlock clamp

NOTE

Not a food-grade hose

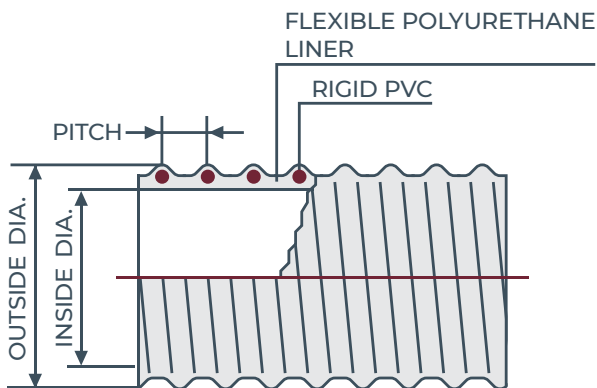


AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.30	0.30	1.5	50	29.8	0.19	100*
1-1/4	1.58	0.33	2.0	45	29.8	0.24	100*
1-1/2	1.81	0.35	2.5	45	29.8	0.37	100*
2	2.36	0.39	3.0	40	29.8	0.50	100*
2-1/2	2.93	0.53	5.0	35	29.8	0.71	100
3	3.50	0.59	6.0	35	29.8	1.00	100
4	4.63	0.65	8.0	30	29.8	1.52	100**
5	5.73	0.87	11.0	30	28.0	2.50	50,100**
6	6.85	0.87	12.0	30	28.0	3.10	50,100**

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. Kanaflex will not be responsible for damage to hose due to over flexing.

* 2,000 ft. order minimum

** 5,000 ft. order minimum

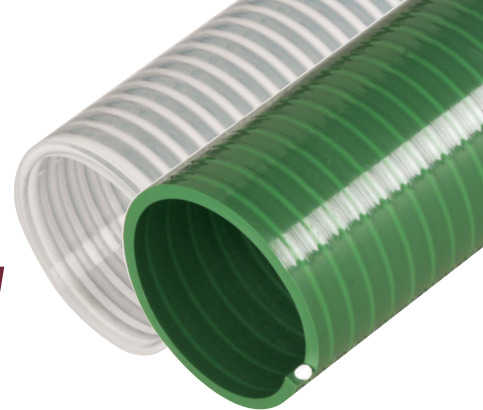

flexFLO™ 110 (110 CL/110 GR)

Heavy-duty water suction and discharge hose

A versatile solution for agricultural, marine, and fish suction applications. Lightweight, flexible, and featuring a clear sidewall for visual inspection, it ensures precise flow in temperatures from -13°F to 140°F.

FEATURES

Lightweight and flexible water and suction hose. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

Heavy-duty water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications

TEMP. RANGE


-13°F to 140°F

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

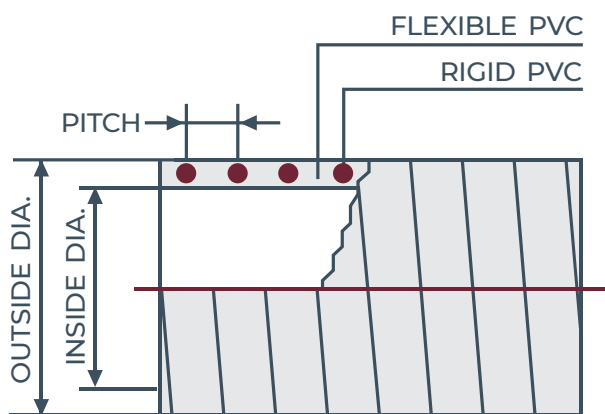

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
3/4	0.95	0.22	1.9	86	29.8	0.16	100
1	1.25	0.22	1.9	86	29.8	0.26	100
1-1/4	1.52	0.26	2.7	79	29.8	0.37	100
1-1/2	1.81	0.30	2.8	72	29.8	0.44	100
2	2.38	0.33	3.9	72	29.8	0.74	100
2-1/2	2.92	0.37	5.0	72	29.8	1.01	100
3	3.41	0.37	7.0	62	29.8	1.21	100
4	4.50	0.43	9.1	55	29.8	2.01	100
5	5.55	0.45	14.0	33	28.0	2.45	50, 100
6	6.67	0.53	15.0	33	28.0	3.37	50, 100
8	8.83	0.70	20.0	28	28.0	5.80	20, 25


Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



flexFLO™ 112 (112 CL/112 AG)

Economical heavy-duty water suction and discharge hose

An ideal solution for various agricultural applications such as air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Lightweight, flexible, and featuring a clear sidewall for visual inspection, it ensures precise flow and optimal drainability.

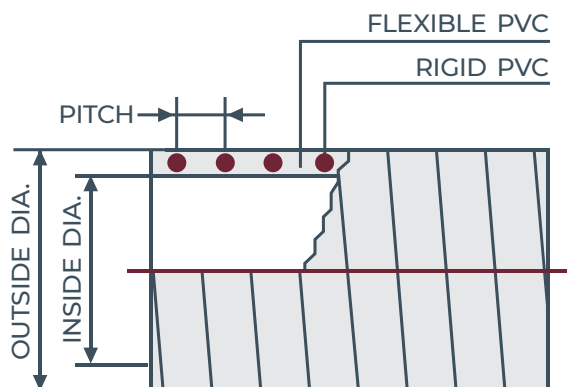

FEATURES

Lightweight and flexible water and suction hose. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

Economical water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications.

TEMP. RANGE

-13°F to 140°F

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/4	1.47	0.26	3.0	80	29.8	0.29	100
1-1/2	1.77	0.30	4.0	70	29.8	0.39	100
2	2.30	0.33	5.0	65	29.8	0.63	100
2-1/2	2.84	0.37	6.0	65	29.8	0.87	100
3	3.35	0.37	8.0	55	29.8	1.05	100
4	4.45	0.43	10.0	50	29.8	1.80	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



flexFLO™ U 113 (113UVCLBK)

All weather suction and discharge hose

An agile solution for diverse agricultural needs. Lightweight and flexible, its blended polyurethane construction enhances abrasion and UV resistance. Ideal for air seeder, fertilizer sprayer, foam markers, irrigation, manure spreading, and fish suction applications.

FEATURES

Lightweight and flexible water and suction hose. Improved abrasion and UltraViolet resistance because of the blended polyurethane construction. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

All weather water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications.

TEMP. RANGE


-13°F to 140°F

CONSTRUCTION

Flexible PVC blended with polyurethane, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

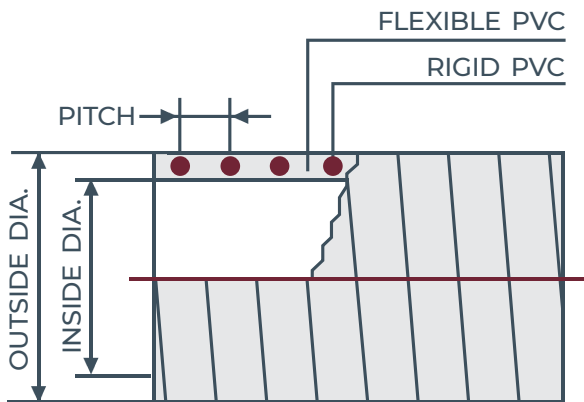

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.22	1.9	86	29.8	0.25	100
1-1/4	1.47	0.26	3.0	80	29.8	0.25	100
1-1/2	1.77	0.30	4.0	70	29.8	0.39	100
1-3/4	2.00	0.30	4.5	65	29.8	0.48	100
2	2.30	0.33	5.0	65	29.8	0.63	100
2-1/2	2.84	0.37	6.0	65	29.8	0.87	100
3	3.35	0.37	8.0	55	29.8	1.05	100


Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



flexFLO™ 114 (114 CL/114 GR)

Lightweight water suction and discharge hose

An ideal solution for various agricultural applications such as air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Lightweight, flexible, and featuring a clear sidewall for visual inspection, it ensures precise flow and optimal drainability.

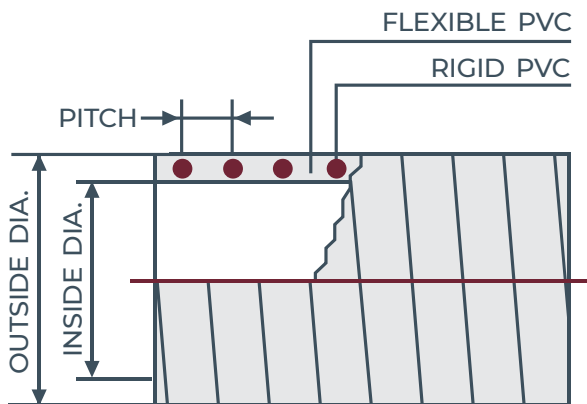

FEATURES

Lightweight and flexible water and suction hose. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

Economical water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications.

TEMP. RANGE

-13°F to 140°F

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/4	1.44	0.26	3.0	65.0	29.8	0.23	100
1-1/2	1.69	0.30	4.0	65.0	29.8	0.28	100
2	2.24	0.33	5.0	60.0	29.8	0.46	100
2-1/2	2.80	0.37	6.0	60.0	29.8	0.66	100
3	3.31	0.37	8.0	50.0	29.8	0.81	100
4	4.39	0.43	10.0	45.0	29.8	1.43	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



flexFLO™ 116 Blue (116 Blue)

Cold weather water suction and discharge hose

An exceptional solution for demanding conditions. Designed to excel in cold weather, this hose ensures reliable water and suction performance with its durable construction.

FEATURES

A cold weather suction and discharge hose that will remain flexible in temperatures as cold as -40°F. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

Cold weather suction and discharge hose that can be used in agricultural applications on fertilizer sprayers and as an irrigation hose. It can also be used for water pumping in most construction applications.

TEMP. RANGE


-40°F to 140°F

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

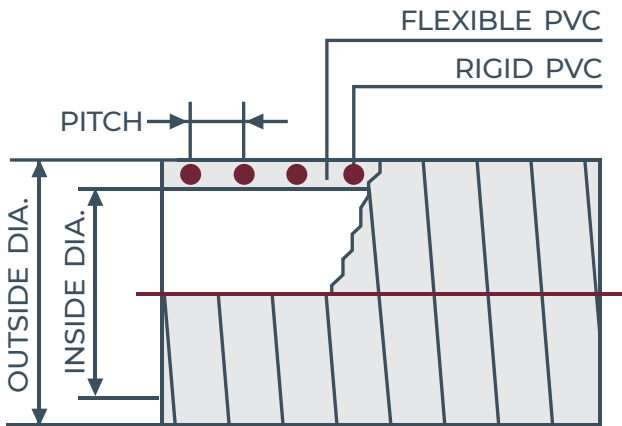

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.22	1.5	70	29.8	0.25	100
1-1/4	1.50	0.26	2.0	70	29.8	0.30	100
1-1/2	1.78	0.30	2.5	56	29.8	0.38	100
2	2.33	0.33	3.0	50	29.8	0.64	100
2-1/2	2.90	0.37	4.5	50	29.8	0.90	100
3	3.38	0.37	6.0	50	29.8	1.10	100
4	4.46	0.43	10.0	42	29.8	1.85	100
6	6.67	0.53	13.0	28	28.0	3.37	50, 100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*




flexFlo™ Spa (SPA WHITE)

Flexible PVC spa hose

A versatile solution for spa applications. Flexible, lightweight, and featuring a smooth bore for precise flow and efficient drainability. Compatible with PVC solvent weld fittings only.

FEATURES

Flexible and lightweight. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

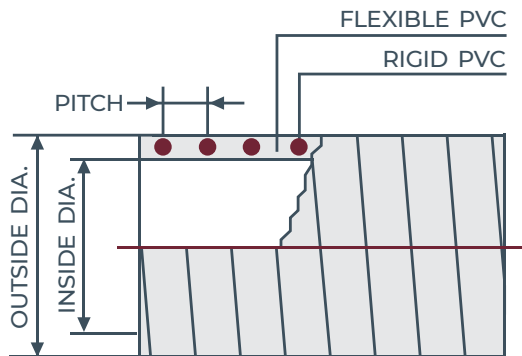

APPLICATIONS

Water lines, air lines, pump lines

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

TEMP. RANGE

-13°F to 158°F

ACCESSORIES

For use with PVC solvent weld fittings only.

NOTE

Not a food-grade hose. For use with PVC solvent weld fittings only. Inside diameter is nominal.

Tolerance on outside diameter is + .020, - .005

See usage/storage suggestions and warranty information before use.

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1/2	0.840	0.22	3.0	100	29.8	0.16	50,100
3/4	1.050	0.22	3.0	100	29.8	0.23	50,100
1	1.315	0.28	3.0	100	29.8	0.32	50,100
1-1/4	1.660	0.30	4.0	80	29.8	0.37	50,100
1-1/2	1.900	0.30	4.0	65	29.8	0.50	50,100
2	2.375	0.34	5.0	60	29.8	0.65	50,100

Like other materials, Spa Hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them. Spa Hose should not be used underground in areas infested by termites.



flexFLO™ lite 100 Blue (100 Blue)

Low temp general water suction and discharge hose

A versatile, lightweight solution for low temperature applications ranging from -40°F to 140°F. Constructed with cold weather PVC, a rigid PVC helix, smooth bore, and corrugated outer diameter, it offers increased flexibility and easy drag in sub-zero conditions. Ideal for general-duty water suction and discharge, with a clear sidewall for visual flow checks.

FEATURES

Lightweight with increased flexibility even at sub-zero temperatures. Clear sidewall permits visual check of material flow. External helix provides for easy drag.

APPLICATIONS

General-duty low temperature water suction and discharge hose with increased flexibility

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION


Cold weather PVC, rigid PVC helix, smooth bore, corrugated O.D.

ACCESSORIES

Banding coil, Powerlock clamp

NOTE

Not a food-grade hose

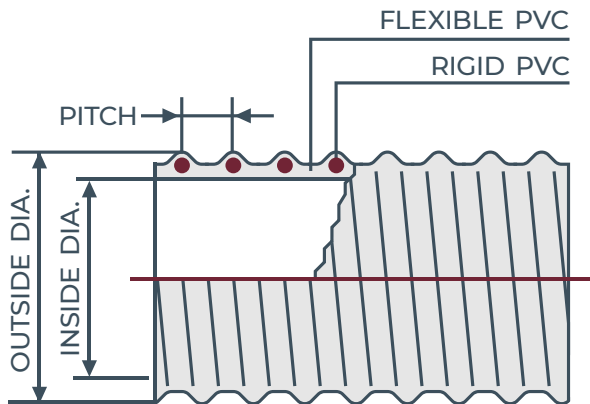

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.30	1.5	40	29.0	0.18	100
1-1/2	1.81	0.35	2.0	35	29.0	0.35	100
2	2.36	0.39	2.5	27	29.0	0.50	100
3	3.50	0.59	5.0	25	29.0	1.00	100
4	4.55	0.65	6.5	20	28.0	1.52	100
6	6.73	0.85	10.6	20	28.0	3.10	50, 100
8	9.04	0.91	16.0	20	28.0	5.38	25

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*