



flexFOOD™

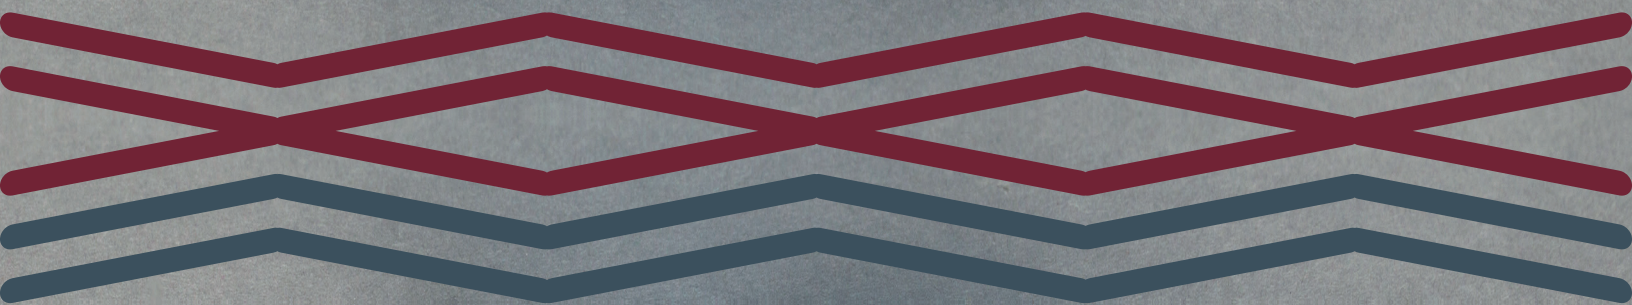

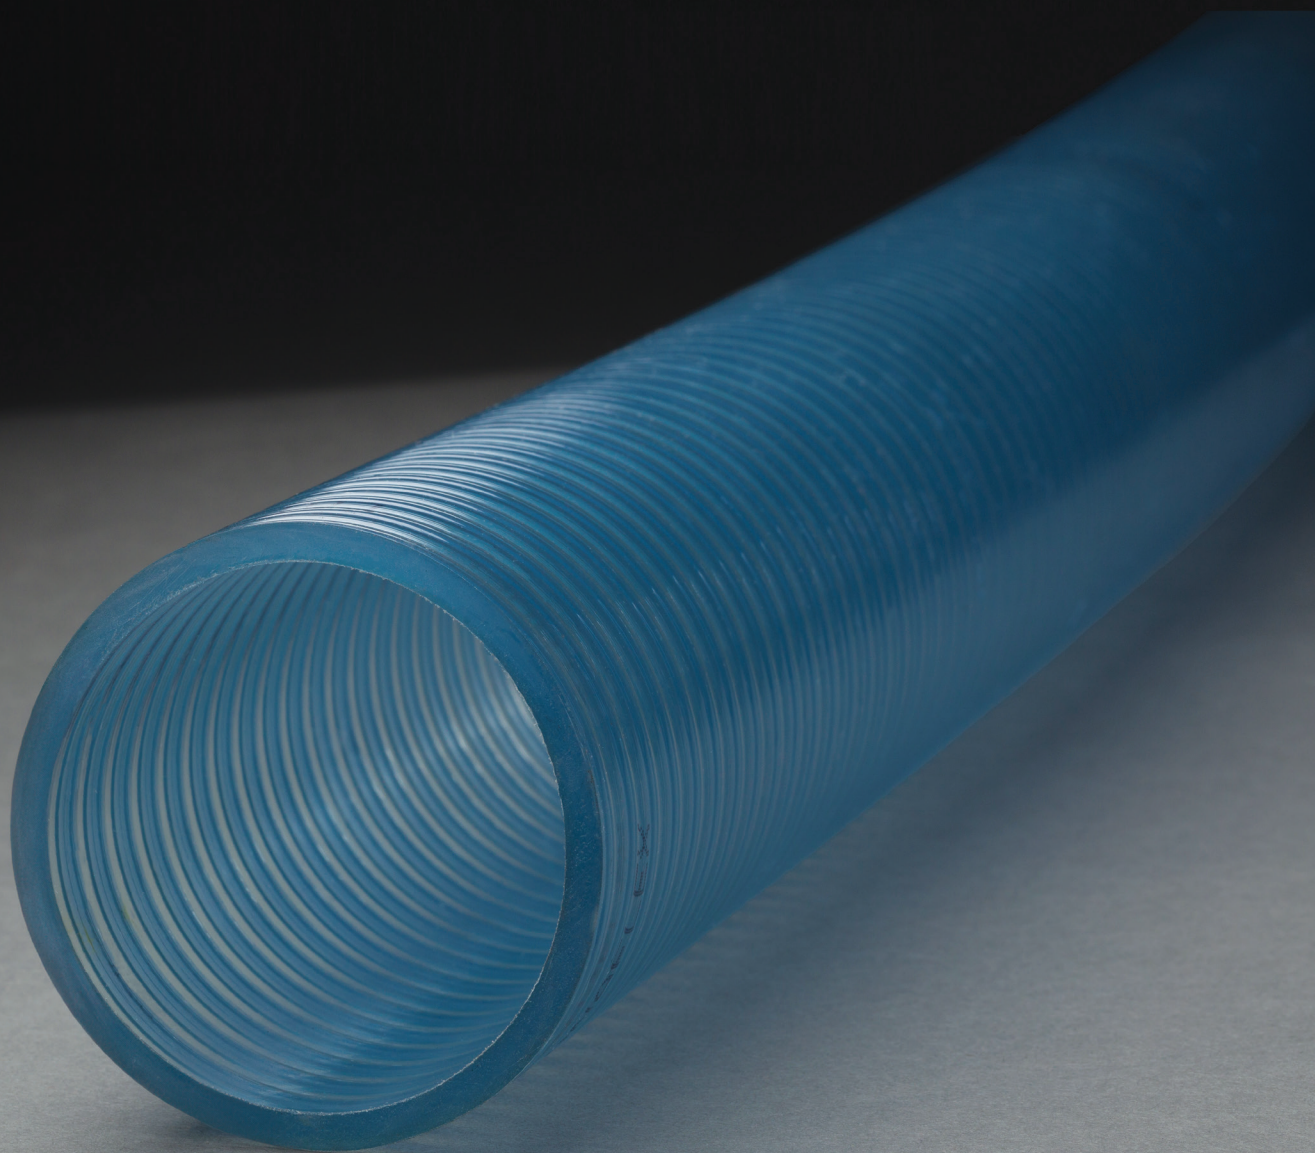

## flexFOOD™ 210 (210 HFG)

### Heavy-duty food grade suction and discharge hose

*Meticulously crafted to meet FDA and 3-A nontoxic standards. With a clear sidewall for visual inspection and a smooth bore ensuring precise flow and optimal drainability.*

#### FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

#### APPLICATIONS

A food grade suction and discharge hose can be used in food and wine processing applications as well as milk trucks.

#### CONSTRUCTION


Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

#### TEMP. RANGE

-13°F to 140°F

#### NOTE

Made with NSF51 approved materials

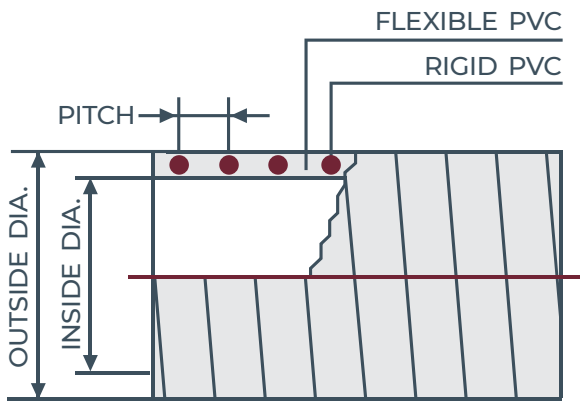

#### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
3/4	.96	0.22	1.9	86	29.8	0.16	100
1	1.25	0.22	1.9	86	29.8	0.26	100
1-1/4	1.54	0.26	2.7	79	29.8	0.37	100
1-1/2	1.82	0.30	2.8	72	29.8	0.44	100
2	2.39	0.33	3.9	72	29.8	0.74	100
2-1/2	2.93	0.37	5.0	72	29.8	1.01	100
3	3.43	0.37	7.0	62	29.8	1.21	100
4	4.53	0.43	9.1	55	29.8	2.01	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



## flexFOOD™ lite 200 (200 SFG)

### Food grade suction and discharge hose

*Meticulously crafted to meet FDA and 3-A nontoxic standards. With a clear sidewall for visual inspection and a smooth bore ensuring precise flow and optimal drainability.*

#### FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

#### APPLICATIONS

Food grade suction hose for use in canning, dairy and bottling.

#### CONSTRUCTION


Produced entirely of compounds in compliance with FDA and 3-A non toxic specifications, flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

#### TEMP. RANGE

-13°F to 140°F

#### NOTE

Made with NSF51 approved materials

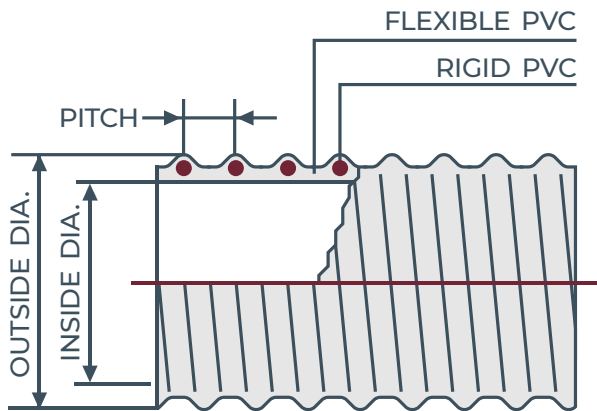

### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.30	1.5	50	29.8	0.18	100
1-1/4	1.52	0.33	2.0	45	29.8	0.22	100
1-1/2	1.81	0.35	2.5	45	29.8	0.35	100
2	2.36	0.39	4.0	40	29.8	0.50	100
2-1/2	2.87	0.56	4.5	35	29.8	0.68	100
3	3.50	0.59	6.0	35	29.8	1.00	100
4	4.63	0.65	8.0	30	29.8	1.52	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*




# flexFOOD™ lite 200 ST (ST 200SFG)

## Medium-duty food grade suction and discharge hose

*Crafted to FDA and 3-A nontoxic standards. Ideal for pneumatic conveying of lightweight solids, featuring a clear sidewall, static grounding wire, smooth bore for precise flow, and drainability. Please note, it is not intended for conveying edible food products.*

### FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. Static grounding wire dissipates static charge when connected to a grounded system. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

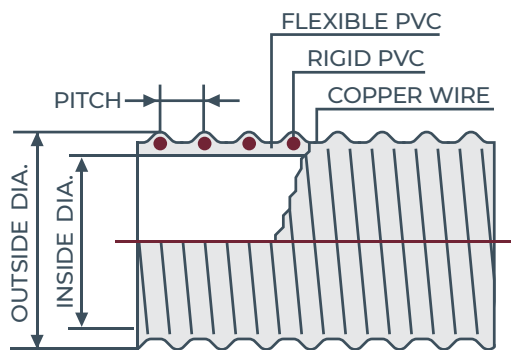

### APPLICATIONS

Pneumatic conveying of lightweight solids such as powders and plastic pellets. Copper static wire is located within the hose tube. Not to be used for conveying edible food products.

### CONSTRUCTION

Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, multi-strand copper static grounding wire, smooth bore, corrugated O.D.

### TEMP. RANGE

-13°F to 140°F

### NOTE

Made with NSF51 approved materials. If used for abrasive materials, monitor the hose for excessive wear. Excessive wear may expose the material to the copper static wire.

### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/2	1.81	0.35	2.5	45	29.8	0.44	50,100
2	2.36	0.39	4.0	40	29.8	0.58	50,100
2-1/2	2.87	0.56	4.5	35	29.8	0.75	50,100
3	3.50	0.59	6.0	35	29.8	1.07	50,100
4	4.63	0.65	8.0	30	29.8	1.52	50,100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*



## flexFOOD™ Milk 212 (212 MK)

### Heavy-duty food grade suction and discharge hose

*Crafted to FDA and 3-A nontoxic standards. Ideal for milk hauling (tank truck) and pick-up, offering flexibility, visual clarity, precise flow, and optimal drainability.*

#### FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

#### APPLICATIONS

A more flexible version of our KanaFlo FG hose. The KanaFlo MK hose is designed specifically for milk hauling (tank truck) and pick-up.

#### CONSTRUCTION


Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

#### TEMP. RANGE

-13°F to 140°F

#### NOTE

Made with NSF51 approved materials

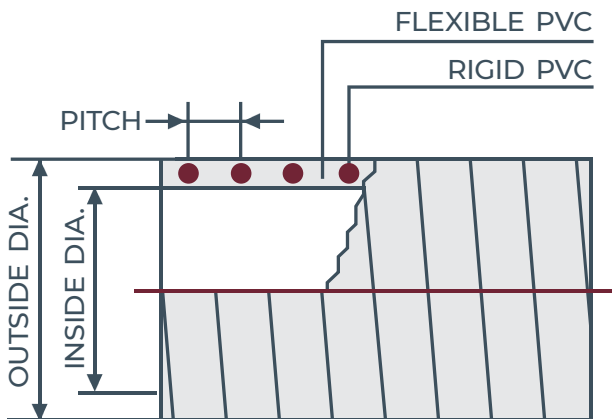

#### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/2	1.82	0.30	2.0	66	29.8	0.44	100
2	2.39	0.33	2.5	66	29.8	0.74	100
2-1/2	2.93	0.37	4.7	66	29.8	1.01	100
3	3.43	0.37	6.1	62	29.8	1.21	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*